



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

REC'D 20 JAN 2005

WIPO

PCT

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

IB/OS/50009

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

04100089.4

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**





Anmeldung Nr:  
Application no.: 04100089.4  
Demande no:

Anmeldetag:  
Date of filing: 13.01.04  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

High speed comparator

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H03F3/45

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI



## DESCRIPTION

### High Speed Comparator

The invention relates to a comparator for high frequency data signals, which comparator may be part of an integrated circuit and particularly useful in the mobile  
5 phone technology.

Many applications, not only in the mobile phone sector, require a high speed comparator which switches whenever a comparison succeeds. Often, the signals to be handled are differentials and the comparison consists in a conversion "double/single  
10 ended" format. "Double ended" means in this context that the comparator deals with two signals in counter-phase, whereas "single ended" means that only one output signal including the result of the comparison is provided by the comparator. Naturally, for processing/comparing fast signals, the comparator has to be sufficiently fast, i.e. usually faster than the signal sequence to follow the signal input variations. Moreover, when  
15 the operative frequency increases, constraints on setup/hold time become key points for the functionality of the whole system. Under such circumstances, it is a mandatory requirement at system-level to keep the internal clock duty-cycle as close as possible to 50% for an interface between the external and the internal signals of an integrated circuit (IC) domain.

20 The duty cycle is here used to describe the characteristics of an electrical signal and is particular relevant to signals having a digital or rectangular waveform. Digital or rectangular waveforms alternate between a low level and a high level or phase, with the transition between levels occurring substantially instantaneously. The term period  
25 refers to the duration of a single cycle. The duty cycle of a digital signal is generally defined as the ratio between the high phase and the period of the digital signal; it is usually stated as a percentage. For example, a digital signal having a pattern of 20% high phase has a 20/100 duty cycle. Generally it is desirable that the duty cycle of a digital clock signal be a "pure 50% cycle", such a pure 50% duty cycle having a  
30 waveform with equal high and low portions.

To achieve the desired high performance, i.e. a high comparison rate or speed of a comparator, it is known to use operational amplifiers with two or more stages. Fig. 1 shows a block diagram of a conventional architecture for a two stage comparator. The first stage is formed by a differential amplifier, illustrated in Fig. 1 on the left. Its two differential inputs IN1 and IN2 are conducted to the control inputs of a first and a second transistor M1 and M2, respectively. The first input terminal IN1 can be used as inverting input and the second input terminal IN2 can be used as non-inverting input of the differential amplifier. The outputs of the first and second transistor M1 and M2 are connected between a constant current source providing a constant tail current  $I_{tail}$  and two further transistors M3 and M4 working as load diodes. This first stage is followed by a second stage comprising an output amplifier. In order to reduce the total current consumption, a class-AB output stage may be chosen as second stage, especially because of its high current efficiency. The second stage may then be connected to a signal reshape unit.

This signal reshape unit is a circuit which makes the output of the class AB stage compliant to a digital signal, e.g. by means of an inverter stage. This is particularly useful in case of high-speed operative conditions. In such cases, it could happen that the class-AB stage provides a sinusoidal-shaped output waveform. The reshape unit performs then a squaring of the above mentioned output, making it compatible with any following digital circuit.

Unfortunately, to speed up the whole comparator, i.e. adapt it to high processing speed, a high tail current  $I_{tail}$  is required at the first stage. There are two reasons for that: The first reason is that a high gain is necessary. The second reason is that the sensitivity to small signal variations at the inputs IN1 and IN2 must be sufficiently large.

For a high speed operation, the decision process inside the input stage should be done fast: the earlier the decision on the small signal variations at the inputs IN1 and IN2 is made the faster is the system.

- 5 A further problem arises in the second stage. When this second stage has switched completely, at least one of its transistors gets out of its active region, and more often even turns off. Then, this transistor needs some time to recover, introducing or necessitating a "recovery time" for the second stage. This "recovery time" will always be needed after a long static state. Obviously, this slows the whole comparator down.

10

Thus, it is an object of the invention to provide a high speed comparator with low power consumption, especially a comparator which can easily be adapted for implementation into an integrated circuit. Such integration also requires that the power consumption of a suitable comparator must be held to a minimum.

15

A particular object is to devise a comparator which does not only provide the gain necessary for the function, but also sufficient sensitivity to small variations of the input.

- A further object is to design a high speed, high sensitive comparator for a large input  
20 range at low power consumption.

- The objects above are solved by a comparator with the features according to the independent apparatus claim 1. In brief, a comparator according to the invention comprises two amplifier stages: A differential amplifier is provided having differential  
25 inputs forming the comparator inputs and a first and second amplifier output, these forming the comparator outputs of a first comparator stage. The second stage includes two differential amplifiers: A first differential current amplifier connected with its inputs to the amplifier outputs and with its output to the first amplifier output, and a second differential current amplifier connected with its inputs to the amplifier outputs  
30 and with its output to the second amplifier output.

The dependent claims identify further advantageous features and developments of the invention.

- In one embodiment of the invention, the comparator according to the invention
- 5 comprises a second comparator stage having an output amplifier whose inputs are connected to the comparator outputs of the first comparator stage and whose output forms the comparator output of the second comparator stage.
- In another embodiment of the invention, the comparator according to the invention
- 10 further comprises a switching means whose control input is connected to the comparator output of the second comparator stage and its control output to the first output of the differential amplifier. Thus, the variation of the duty cycle of the comparator signal can be decreased.
- 15 As a further improvement to the comparator, the switching means is a transistor which advantageously may be connected to the one output of the differential amplifier whose output signal needs longer to reach the comparator output of the second comparator stage.
- 20 In another preferred embodiment of the comparator according to the invention, the switching means is in series connected to a current mirror transistor, whereby the current mirror transistor is provided to adjust a determined current flowing through the switching means.
- 25 Also, the differential amplifier of the comparator according to the invention may comprise a first and a second input transistor whose control outputs are connected to an auxiliary current source. With that, the high performance of the comparator can be maintained even for a very low supply voltage.



As a further variation, the auxiliary current source of the comparator may be connected via a current mirror to the input transistors and, even further, this current mirror may be connected via a further current mirror to the input transistors.

- 5 Even further, the auxiliary current source of the comparator is connectable via a switching transistor to the current mirror.

Advantageously, the switching transistor of the comparator may be arranged to be switched on whenever the supply voltage falls under a predetermined reference voltage.

10

Additional objects and advantages of the invention will be evident from the subsequent description or may become apparent when practicing the invention.

Subsequently, the invention is further explained with the drawings showing in

15

Fig. 1 a schematic diagram of an embodiment of a comparator according to the prior art;

20

Fig. 2 a schematic diagram of a first embodiment of a comparator according to the invention;

Fig. 3 a schematic diagram of a second embodiment of the comparator according to the invention; and

25

Fig. 4 a schematic diagram of a third embodiment of the comparator according to the invention.

Fig. 1 shows a block diagram of a conventional two-stage comparator circuit. This conventional circuit is explained above in the section "Background of the invention".

30

Fig. 2 illustrates a first embodiment of the invention. The comparator circuit shown there is in principle a two stage comparator. The first comparator stage includes a differential amplifier M1 and M2 and two differential current amplifiers A11 and A12. The second comparator stage is an output amplifier and includes the transistors M7 to  
5 M10.

The differential amplifier of the first comparator stage has two input transistors M1 and M2 whose control inputs are coupled to the inputs IN1 and IN2 of the comparator. The first input terminal IN1 can be used as inverting input and the second input terminal  
10 IN2 as non-inverting input of the differential amplifier. The outputs of the first and second transistor M1 and M2 are connected between a constant current source providing a constant tail current  $I_{tail}$  and two further transistors M3 and M4 working as load diodes. So far, the differential amplifier has a same structure similar to the prior art differential amplifier shown in Fig. 1.

15

The significant difference is that the first comparator stage additionally includes a first and a second differential current amplifier A1<sub>1</sub> and A1<sub>2</sub>. The two inputs of the first differential current amplifier A1<sub>1</sub> are coupled to the outputs Vo and Vo-, respectively, of the differential amplifier. The same applies to the inputs of the second differential  
20 current amplifier A1<sub>2</sub>.

The output of the first differential current amplifier A1<sub>1</sub> is connected to the first output Vo of the differential amplifier, whereas the output of the second differential current amplifier A1<sub>2</sub> is connected to the second output Vo- of the differential amplifier. The  
25 common output of the differential amplifier and the first differential current amplifier A1<sub>1</sub> are connected to the control input of the transistor M6. One of the control outputs of this transistor M6 is connected to the supply voltage VDD, while the other control output of this transistor M6 is connected to the control output of the transistor M5, the latter functioning as diode, and to the control input of the transistor M8. The control  
30 output of the transistor M6 is usable as first output O1 of the first comparator stage. The

common output of the differential amplifier and the second differential current amplifier  $Al_2$  forms the second output  $O2$  of the first comparator stage.

5 The control inputs of the transistors  $M7$  and  $M8$  of the second comparator stage are connected to the outputs  $O1$  and  $O2$  of the first comparator stage. The transistors  $M7$  and  $M8$ , respectively, are used to connect the supply voltage  $VDD$  or ground  $GND$  to the output amplifier. At the output  $OUT$  of the output amplifier, the comparator signal, which is the result of the comparison between the signal voltages at inputs  $IN1$  and  $IN2$ , can be picked off.

10

The comparator illustrated in Fig. 2 works as follows: The current is boosted through the second comparator stage only when necessary. A residual current is used to prevent that the transistors in the second comparator stage are completely switched off. By means of a positive current feedback, the transistors  $M3$  and  $M4$ , which work as load, are then forced by an additional current to be "soft on". This is explained further below. The result is that the controlling voltages for the second comparator stage are speeded up. The residual current keeps on flowing even after the transition is completed, as explained in the following.

20 The differential current amplifiers  $Al_1$  and  $Al_2$  are sourced by the currents flowing through the transistors  $M3$  and  $M4$  and are mirrored by the transistors of the same size inside the differential current amplifiers  $Al_1$  and  $Al_2$ . The transfer function of the current amplifiers  $Al_1$  and  $Al_2$  is:

25 
$$I_{OUT} = \begin{pmatrix} \alpha(I_{plus} - I_{minus}) \\ 0 \end{pmatrix} \begin{matrix} | I_{plus} \geq I_{minus} \\ | I_{plus} < I_{minus} \end{matrix}$$

wherein

$I_{plus}$  is the current at the non-inverting input of the differential current amplifier  $Al_1$  or  $Al_2$ ,

$I_{\text{minus}}$  is the current at the inverting input of the differential current amplifier  $A_{11}$  or  $A_{12}$ , and

$I_{\text{OUT}}$  is the output current of  $A_{11}$  or  $A_{12}$ .

- 5 Suppose that a positive voltage step occurs at the negative input  $IN_1$  while on the positive input  $IN_2$  it does not. Hence the current flowing through the load transistor  $M_3$  increases; the second current amplifier  $A_{12}$  senses this difference and provides an output current  $I_{\text{OUT}2}$  proportional to the difference between the currents  $I_{M3}$  and  $I_{M4}$ , wherein  $I_{M3}$  is the current flowing through the transistor  $M_3$  and  $I_{M4}$  is the current
- 10 flowing through the transistor  $M_4$ . An extra negative current is spilled from the transistor  $M_4$  and results in a small increase in the absolute value of the drain-source voltage  $V_{ds4}$ , while the drain-source voltage  $V_{ds2}$  decreases, forcing transistor  $M_1$  to draw a small current from transistor  $M_2$ . This small current contributes to the total residual current in transistor  $M_3$  increasing it, thus accelerating this positive feedback.
- 15 When the transaction is completed, the residual negative current still flows on transistor  $M_4$  and thus versus the output  $O_2$ . This so-called "soft on" helps the next switching phase because transistor  $M_4$  is not completely switched off.

In the prior art embodiment according to Fig. 1, the transistor  $M_4$  would have been

20 completely switched off, i.e. the current  $I_{M4}$  through transistor  $M_4$  would be zero. After a long static state, it would take some time to switch on the transistor  $M_4$  in the prior art embodiment according to Fig. 1.

In case of a positive voltage step at the positive input  $IN_2$ , the behavior of the

25 comparator circuit is in principle the same as described above. But now, instead of the transistor  $M_4$ , the transistor  $M_3$  is switched "soft on".

To reduce the total current consumption, a class-AB operational amplifier may be chosen because of its high current efficiency at the output stage. The output stage uses

30 current only when a transition takes place, in all other cases only a quiescent current is flowing through the output stage.

Overall, the comparator as shown in Fig. 2 operates at high speed and has a lower current consumption than the embodiment shown in Fig. 1.

- 5 The double-mirrored operational amplifier shown in Fig. 2 may have an intrinsic asymmetry in the output waveform due to the different path length from the input to the output stage, indicated by the two arrows P1 and P2 in Fig. 2. The particular path which includes more transistors than the other path, is defined as the longer path. Obviously this is the path P1 in the embodiment shown in Fig. 2. The asymmetry may  
10 result in an unbalanced duty cycle having a duty cycle variation  $\delta_{CLK}$ .

- In certain cases, this variation  $\delta_{CLK}$  may become a problem with respect to the functionality of the whole system. For instance, in applications like mLVDS/RSDS interfacing, i.e. when interfacing "mini low voltage differential signals" (mLVDS) and  
15 "reduced swinging differential signals" (RSDS), since both protocols work on the rising and falling edges of the clock and the setup/hold specifications are intended for both transitions, a large duty cycle variation  $\delta_{CLK}$  may complicate the fitting of the specifications.

- 20 Fig. 3 shows a comparator that solves this problem. This comparator includes a digital speed-up of the slower path P1 to overcome the above-mentioned limitation. Thus the duty cycle variation  $\delta_{CLK}$  can be kept in a reasonable range of about  $\pm 5\%$  as function of the supply voltage, temperature and process spreading.

- 25 In the following, the working principle of the comparator shown in Fig. 3 is explained. Suppose that a voltage step occurs at the positive input IN2 while it does not occur at the negative input IN1. After a propagation time through the short path P2, the output OUT of the second comparator stage switches to "on". Due to that, the switch transistor M11 turns on, enabling a current sinking from the load transistor M3. If nothing  
30 happens, the circuit stays in this new state, and charges all parasitic elements in the long path P1. In fact, the increased current flowing through the transistor M3 is mirrored

and forced in the path P1 by the mirror chain. The mirror chain consists of the transistors M6, M5 and M8 and mirrors the current over the transistors M6 and the transistor M5 to the transistor M8.

- 5 As soon as the input changes, the voltage step on the negative input terminal IN1 forces the second comparator stage to switch, but from a starting point at which the slow path P1 is already speeded up. This allows to compensate the delay introduced by the double-mirror architecture.
- 10 For this purpose, according to Fig. 3, a switching transistor M11 and a current mirror transistor M12 are provided, both being connected in series and coupled to the output Vo of the differential amplifier. The control input of the switching transistor M11 is controlled by the output OUT of the second comparator stage, while the current mirror transistor M12 is controlled by the current source  $I_{tail}$ . The current mirror transistor
- 15 M12 provides a current  $\alpha I_{tail}$  following through the switching transistor M11, if it is switched on.

An additional reason for the duty cycle variation  $\delta_{CLK}$  can be the wide voltage range in which the circuit has to operate. First of all, to make the comparator fast and able to

- 20 sense small input variations, the tail current  $I_{tail}$  must be high enough because it influences the gain of the input transistors M1 and M2 and thus the bandwidth. Unfortunately, when the supply voltage VDD is very low, e.g.  $< 2.3$  V, a high current could force the input pair of transistors M1 and M2 into their linear region, especially when the common-mode voltage VCM is close to its low boundary. In this condition, a
- 25 big offset is introduced and thus the duty cycle variation  $\delta_{CLK}$  increases.

The above mentioned weak situation becomes even worse for the mLVDS interface for which the working current is higher than the RSDS. A solution for adapting the current to this kind of interface to the supply voltage VDD and to the common-mode level

- 30 VCM is compulsory to avoid large duty-cycle variations  $\delta_{CLK}$ .

When the supply voltage VDD is smaller than the threshold voltage  $V_{thresh}$  fixed by the transistors M2 and M3, no current flows through the transistors and the "on" signal is unable to switch the transistor M18 on. The additional current  $I_x$  flowing through the transistor M23 is then zero. Lowering the current at low supply voltage VDD prevents  
5 the pair of input transistors M1 and M2 to reach their linear region and thus the offset increases.

For this purpose, the current source  $I_{bias}$  is exploited for providing all the necessary currents all over the circuit. This current source, which is connected via a transistor  
10 M18 to a first current mirror consisting of transistors M19 and M20, provides the voltage-dependent part of the tail current, now flowing through M22. A second current mirror consisting of transistors M21 and M23 provides the voltage-independent part of the tail current for the input transistors M1 and M2. When the supply voltage VDD is lower than the threshold voltage  $V_{thresh}$ , the transistor M18 is switched off.  
15 Subsequently, the auxiliary current  $I_{bias}$  does not flow through the current mirror transistor M19, thus the current  $I_x = m \cdot I_{bias}$  at the output of the second current mirror M21, M23 is not delivered. Then, the current  $(n-m) \cdot I_{bias}$  is flowing through the transistor M22.

20 As explained before, by reducing the current in the input stage at low supply voltage Vdd, one prevents that the input transistors M1 and M2 get into their linear region, contributing to an offset increase. In this latter case, if the offset due to the input stage is larger, the moment when the comparator will decide the final result is different from the ideal case in which the duty-cycle is 50%. This is the reason why it is necessary to  
25 lower the current in the input stage so that the offset is minimized or even eliminated.

Having illustrated and described several preferred embodiments for a novel comparator protection means for an integrated circuit, it is noted that variations and modifications in the device and the method can be made without departing from the core of the  
30 invention or the scope of the appended claims.

REFERENCE NUMBER LIST

	IN1	first input
	IN2	second input
5	VDD	supply voltage
	GND	ground or reference potential
	$V_{\text{thresh}}$	threshold voltage
	I <sub>bias</sub>	bias current
	IOUT2	output current of AI2
10	M1	first input transistor
	M2	second input transistor
	M3	first load
	M4	second load
	M5 – M23	transistors
15	AI1	first current amplifier
	AI2	second current amplifier
	P1	long signal path
	P2	short signal path
	O1	first output of the first comparator stage
20	O2	second output of the first comparator stage
	OUT	output of the second comparator stage



CLAIMS

1. A comparator, *comprising*:
  - a differential amplifier (M1, M2) having differential inputs (IN1, IN2) forming the comparator inputs, and a first and second amplifier output (Vo, Vo-) forming the comparator outputs of a first comparator stage,
  - 5    - a first differential current amplifier (A11) connected with its inputs to said amplifier outputs (Vo, Vo-) and connected with its output to said first amplifier output (Vo), and
  - a second differential current amplifier (A12) connected with its inputs to said amplifier outputs (Vo, Vo-) and connected with its output to said second amplifier output (Vo-).
  - 10
2. The comparator according to claim 1, *further comprising*  
a second comparator stage having an output amplifier (M5 – M10) whose inputs are connected to the comparator outputs (Vo, Vo-) of the first comparator stage and  
15    whose output forms the comparator output (OUT) of said second comparator stage.
3. The comparator according to claim 2, *further comprising*  
switching means (M11) whose control input is connected to the comparator output (OUT) of the second comparator stage and whose control output is connected to the  
20    first output (Vo) of the differential amplifier (M1, M2).
4. The comparator according to claim 3, *wherein*  
the switching means (M11) is a transistor.

5. The comparator according to claim 3 or 4, *wherein*  
the switching means (M11) is connected to the output of the differential amplifier  
(M1, M2) whose output signal needs longer to reach the comparator output (OUT)  
of the second comparator stage.
- 5
6. The comparator according to claim 3, 4 or 5, *wherein*  
the switching means (M11) is in series connected to a current mirror transistor  
(M12), said current mirror transistor (M12) being provided to adjust a  
predetermined current ( $\alpha I_{tail}$ ) flowing through said switching means (M11).
- 10
7. The comparator according to any preceding claim, *wherein*  
the differential amplifier comprises a first and a second input transistor (M1, M2)  
whose control outputs are connected to an auxiliary current source (Ibias).
- 15
8. The comparator according to claim 7, *wherein*  
the auxiliary current source (Ibias) is connected via a current mirror (M19, M20) to  
the input transistors (M1, M2).
9. The comparator according to claim 8, *wherein*  
the current mirror (M19, M20) is connected via a further current mirror (M21,  
M23) to the input transistors (M1, M2).
- 20
10. The comparator according to claim 9, *wherein*  
the auxiliary current source (Ibias) is connectable via a switching transistor (M18)  
to the current mirror (M19, M20).
- 25
11. The comparator according to claim 10, *wherein*  
the switching transistor (M18) is provided to be switched on, when the supply voltage  
(VDD) falls under a certain reference voltage ( $V_{thresh}$ ).

ABSTRACT

## High Speed Comparator

The invention relates to a comparator with a constant duty cycle for high frequency data signals. Such comparators are often part of an integrated circuit and particularly useful  
5 in the mobile phone technology.

To achieve the desired constant duty cycle for high frequency data signals, the comparator according to the invention comprises a differential amplifier (M1, M2) having differential inputs (IN1, IN2) forming the comparator inputs and a first and second amplifier output (Vo, Vo-) forming the comparator outputs of a first comparator  
10 stage. Further, a first differential current amplifier (A11) is provided and connected with its inputs to the amplifier outputs (Vo, Vo-) and with its output to the first amplifier output (Vo). Finally, a second differential current amplifier (A12) is connected with its inputs to the amplifier outputs (Vo, Vo-) and with its output to the second amplifier output (Vo-).

15

Fig. 3



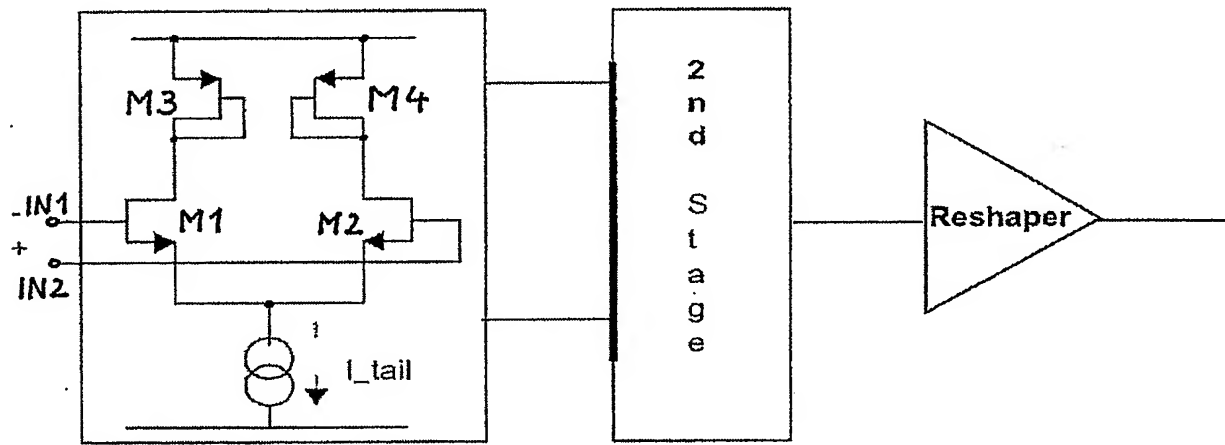


Fig. 1

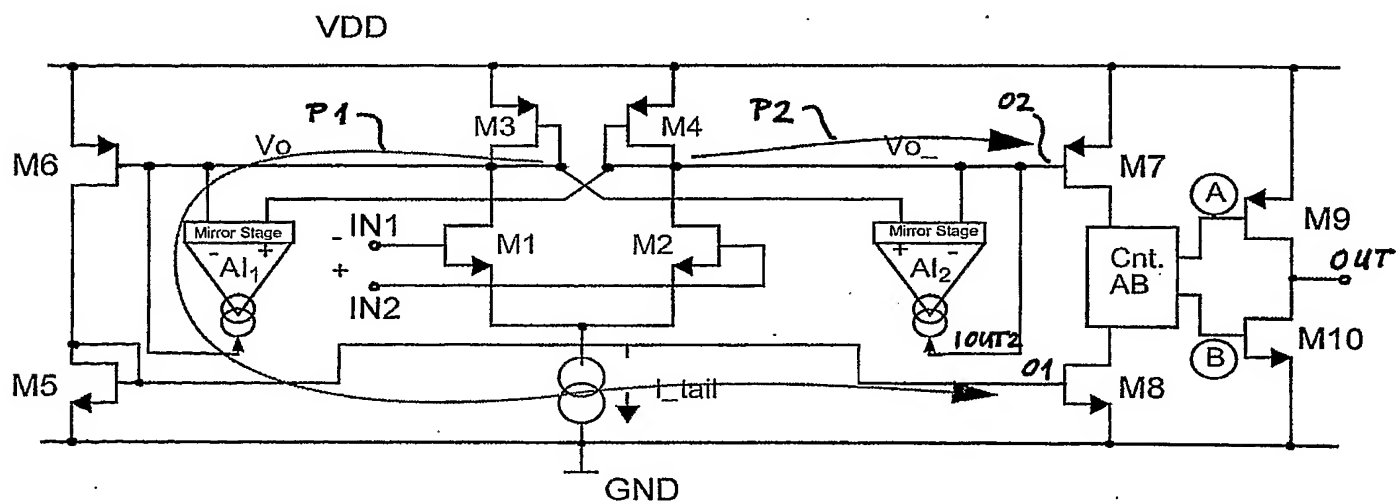


Fig. 2

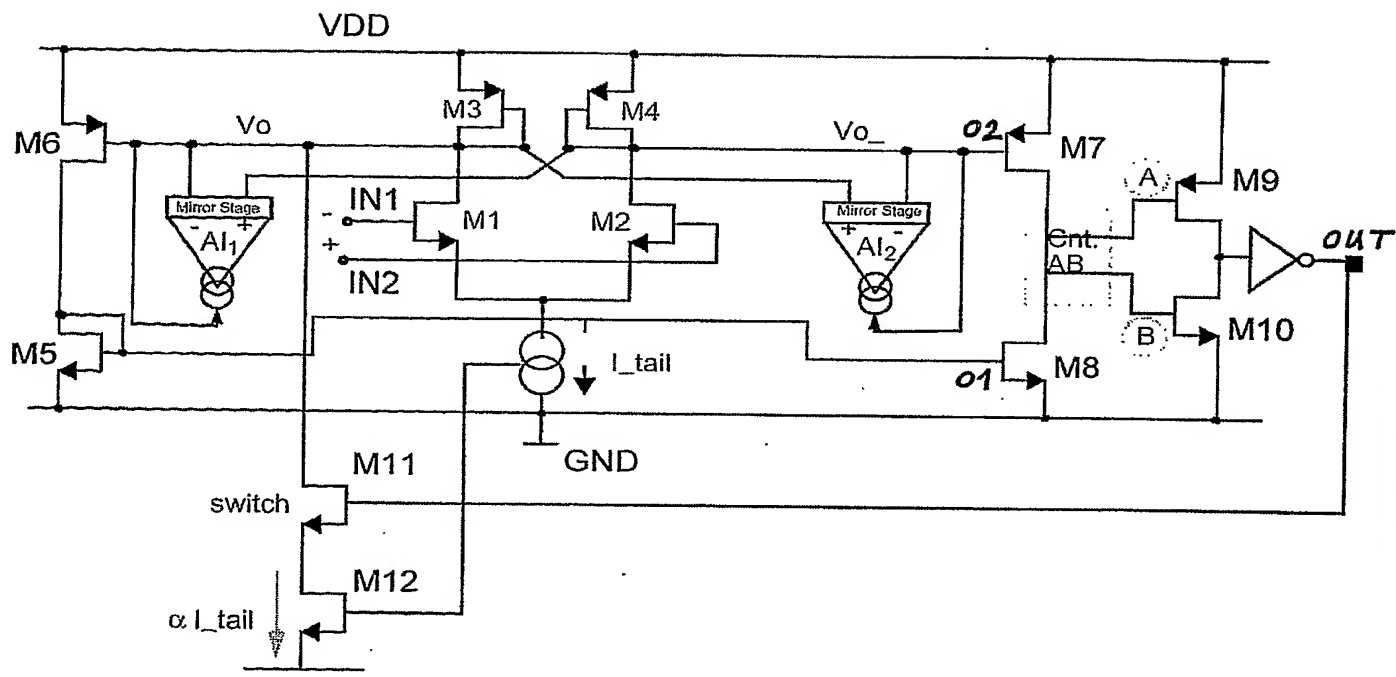


Fig. 3

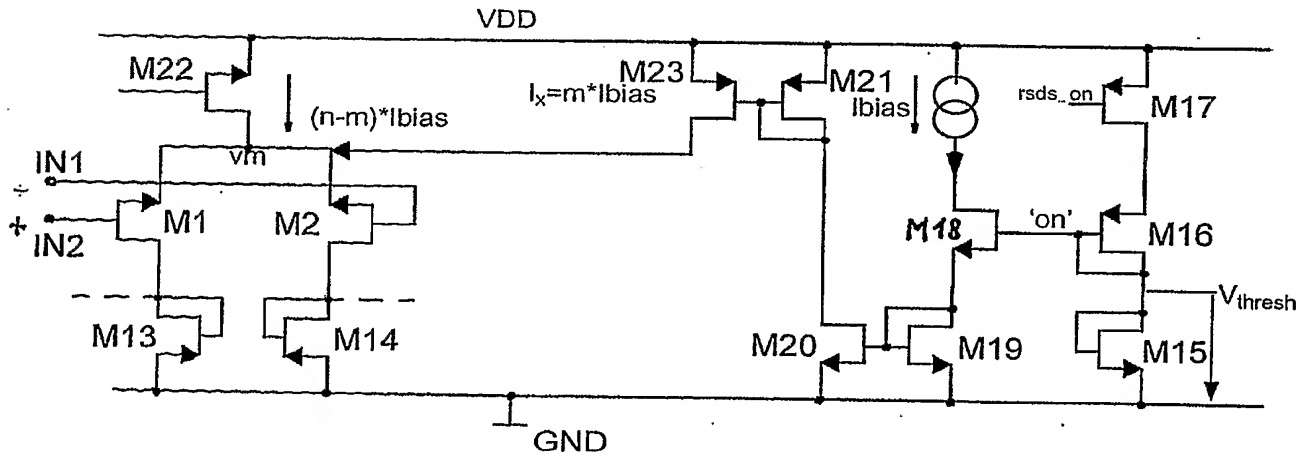


Fig. 4